

Spindellejer

Nomenclature og specifikationer



DKC



A/S DANSK KUGLELEJE CENTER

Tlf: 44 84 33 88 - Email: dkc@dkc-as.dk

Spindelleje specifikationer

		B 70 08-C		-T-P4S-UL		
		HSS 70 08-C		-T-P4S-UL		
		HCB 70 08-C		DLR -T-P4S-UL		
		B 70 08-C		2RSD-T-P4S-UL		
		B 70 08-C		-T-P4S-UL		
Type						Preload
B	Standard Steel balls					L Light
HCB	Hybrid standard Ceramic balls					M Medium
RS	High speed bearing Steel balls					H Heavy
HCRS	High speed bearing Ceramic balls					Bearing arrangement
HS	Bearing with small balls Steel balls					U Single bearing
HSS	Bearing with small balls Steel balls					Arrangement in any combo
	Sealed					DU 2 bearing set, universal
HC	Bearing with small balls Ceramic balls					TU 3 bearing set, universal
HCS	Bearing with small balls Ceramic balls					QU 4 bearing set, universal
	Sealed					PU 5 bearing set, universal
XC	Cronidur Bearing with small balls Ceramic balls					Accuracy
XCS	Cronidur Bearing with small balls Ceramic balls					P4S FAG standard better than P4 to DIN 620
						P4S-K5 Restricted diameter tolerance compared to P4S
Dimension series						Cage
719	Light series					T Laminated fabric, guidance on outer ring
70	Medium series					Sealing
72	Heavy series					2RSD Sealed on both sides and greased
Bore code						Direct Lube
00	10 mm					DLR Direct lubrication, annular slots with O Rings
01	12 mm					Contact angle
02	15 mm					C 15°
03	17 mm					D 20°
04	4 · 5 = 20 mm					E 25°
05	5 · 5 = 25 mm					

Super præcisions cylindriske rullelejer

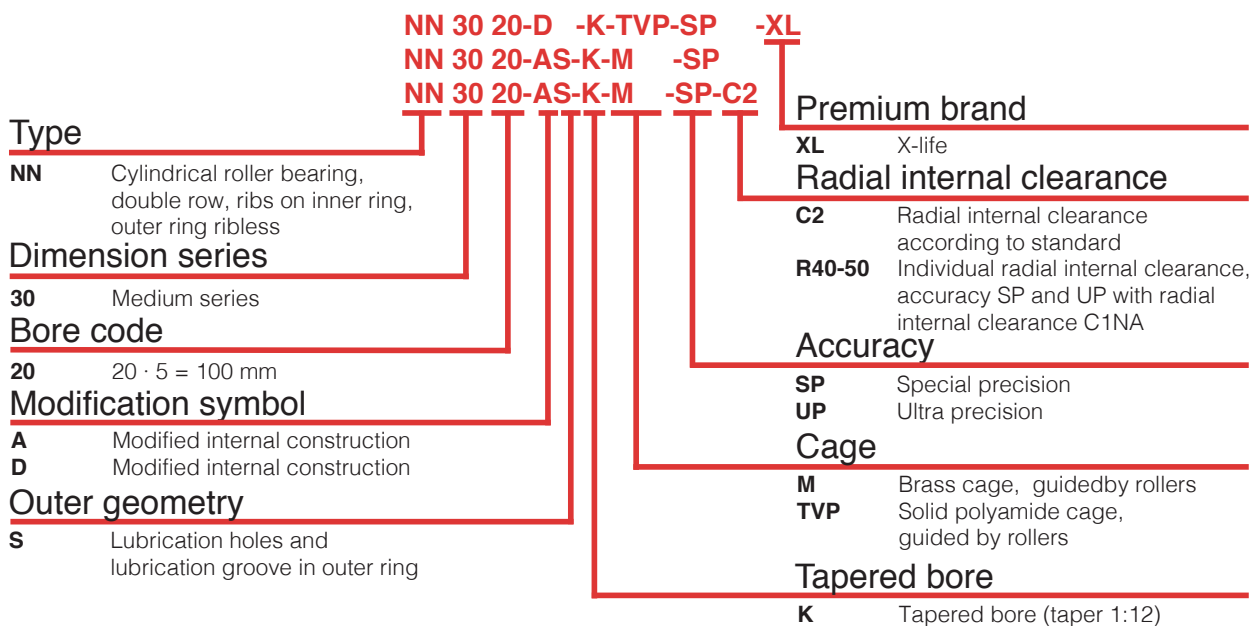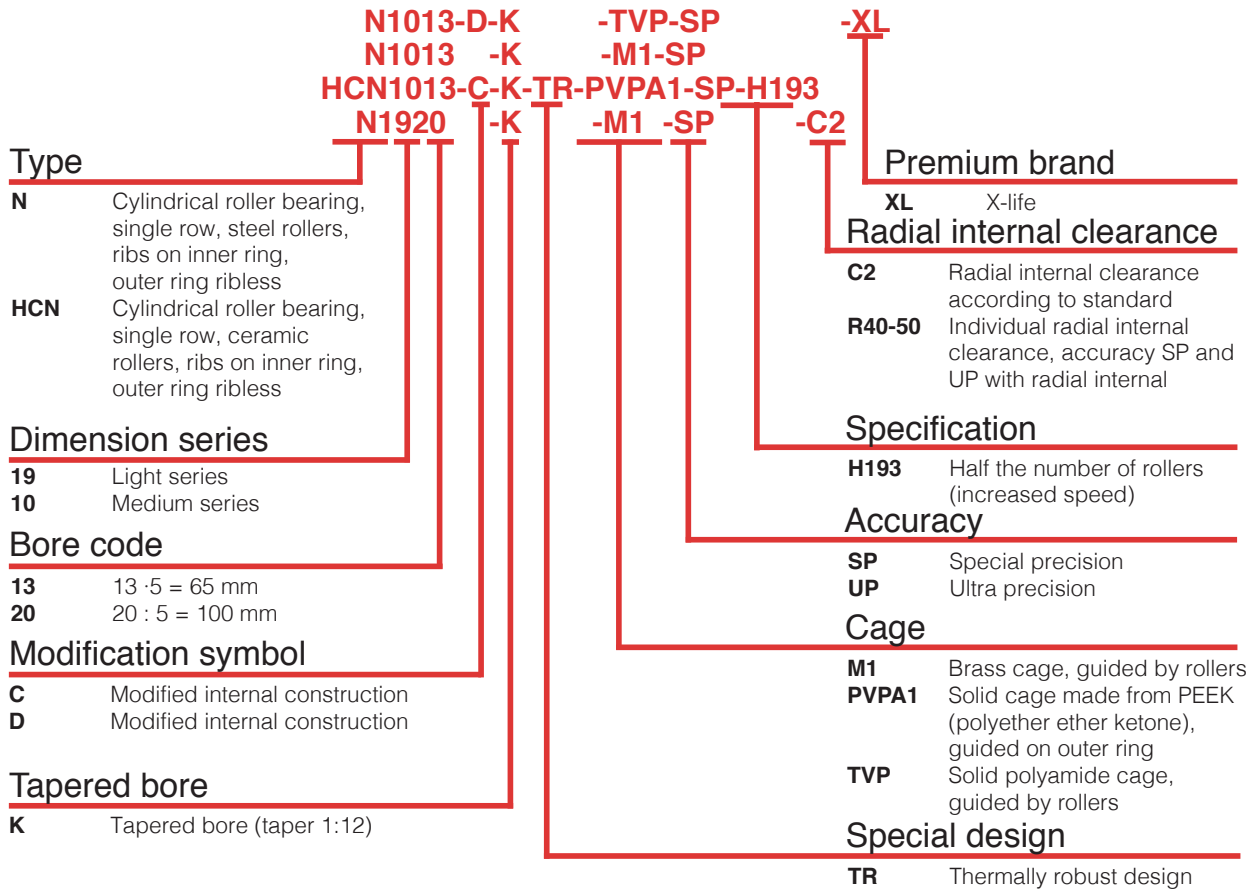

Aksiale lejer

