


Rullekæde Rollerchain

British standard & American standard

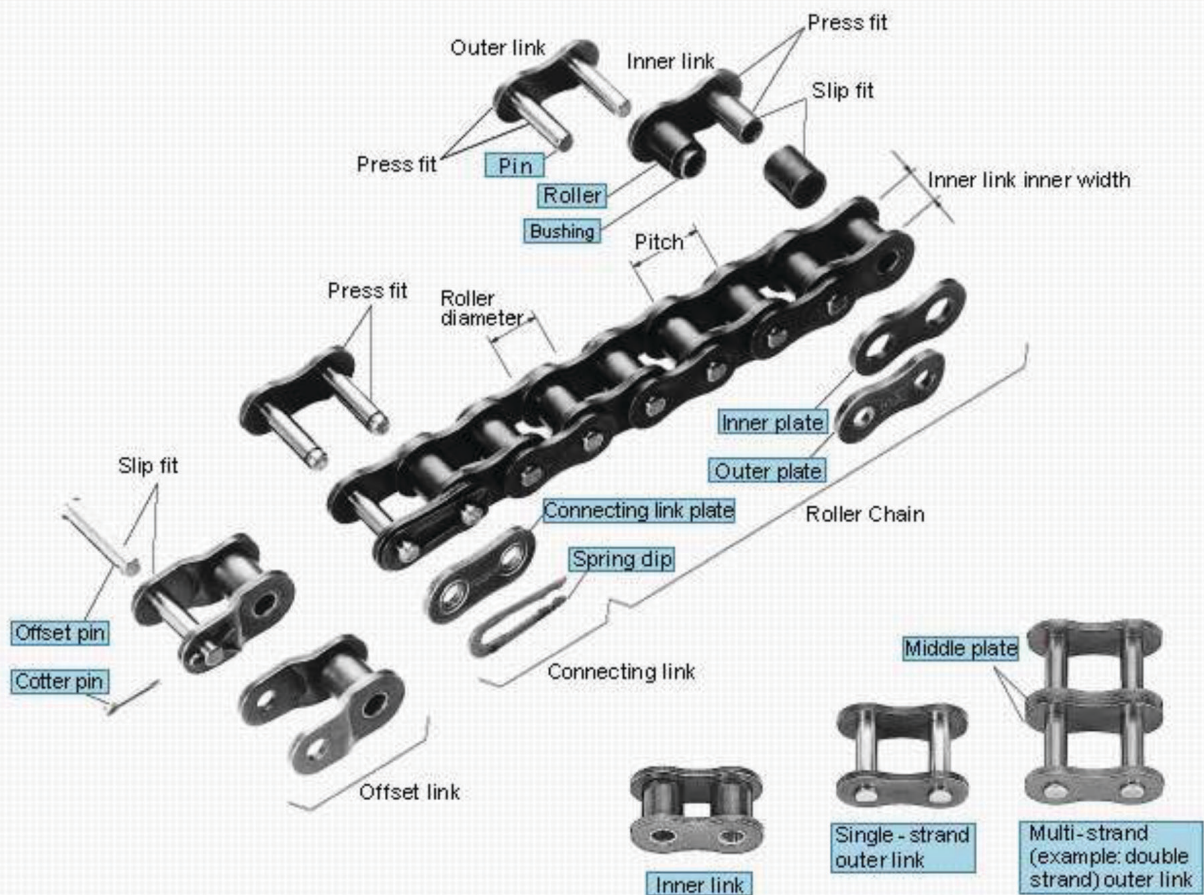


A/S DANSK KUGLELEJE CENTER

Tlf: 44 84 33 88 - Email: dkc@dkc-as.dk

Simplex roller chains, ISO 606 / DIN 8187

European type / British standard


| Chain - No. | Pitch p | | Inner width | Roller Ø | Pin Ø | Inner link width | Link plate height | Pin length | Length of conn link pin | Bearing area | Required min. breaking strength DIN/ISO | Rexnord minimum breaking strength | Weight | Components | | | | | | | | | |
|-------------|---------|--------|-------------|----------|-------|------------------|-------------------|------------|-------------------------|--------------|---|-----------------------------------|--------|---------------------|---------------------|---------------------|---------------------|------|---------------------|---------------------|---|----------------|----------------|
| | | | | | | | | | | | | | | b ₁ min. | d ₁ max. | d ₂ max. | b ₂ max. | g | a ₁ max. | a ₂ max. | A | F _B | F _B |
| | Inch | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | cm ² | N | N | kg/m | A | B | C | E | L |
| 04 | | 6.00 | 2.8 | 4 | 1.85 | 4.1 | 5 | 7.4 | 10.3 | 0.08 | 3 000 | 3 000 | 0.12 | | | | x | x | | | | | |
| 05 B - 1 | | 8.00 | 3 | 5 | 2.31 | 4.77 | 7.1 | 8.6 | 11.7 | 0.11 | 4 400 | 4 400 | 0.18 | | | | x | x | | | | | |
| 06 B - 1 | 0.375 | 9.52 | 5.72 | 6.35 | 3.28 | 8.53 | 8.2 | 13.5 | 16.8 | 0.28 | 8 900 | 9 000 | 0.41 | | | | x | x | | | | | |
| 083 | 0.5 | 12.70 | 4.88 | 7.75 | 4.09 | 7.9 | 10.3 | 12.9 | 14.4 | 0.32 | 12 000 | 12 000 | 0.42 | | | | x | x | x | | | | |
| 084 | 0.5 | 12.70 | 4.88 | 7.75 | 4.09 | 8.8 | 11.1 | 14.8 | 16.3 | 0.326 | 16 000 | 16 000 | 0.6 | | | | x | x | x | | | | |
| 08 B - 1 | 0.5 | 12.70 | 7.75 | 8.51 | 4.45 | 11.3 | 11.6 | 17 | 20.9 | 0.5 | 17 800 | 21 000 | 0.7 | x | x | x | x | x | x | | | | |
| 10 B - 1 | 0.625 | 15.87 | 9.65 | 10.16 | 5.08 | 13.28 | 14.6 | 19.6 | 23.7 | 0.67 | 22 200 | 25 000 | 0.9 | x | x | x | x | x | x | | | | |
| 12 B - 1 | 0.75 | 19.05 | 11.68 | 12.07 | 5.72 | 15.62 | 15.9 | 22.7 | 27.3 | 0.89 | 28 900 | 32 000 | 1.15 | x | x | x | x | x | x | | | | |
| 16 B - 1 | 1 | 25.40 | 17.02 | 15.88 | 8.28 | 25.4 | 20.5 | 36.1 | 42.4 | 2.1 | 60 000 | 80 000 | 2.6 | x | x | x | x | x | x | x | | | |
| 20 B - 1 | 1.25 | 31.75 | 19.56 | 19.05 | 10.19 | 29.0 | 25.7 | 40.4 | 47.6 | 2.96 | 95 000 | 120 000 | 3.7 | x | x | | | | | x | x | | |
| 24 B - 1 | 1.5 | 38.10 | 25.4 | 25.4 | 14.63 | 37.9 | 33 | 53.8 | 60.6 | 5.54 | 160 000 | 211 000 | 6.9 | x | x | | | | | | x | x | |
| 28 B - 1 | 1.75 | 44.45 | 30.99 | 27.94 | 15.9 | 46.5 | 37 | 63.3 | 72.8 | 7.39 | 200 000 | 256 000 | 8.6 | x | x | | | | | | x | x | |
| 32 B - 1 | 2 | 50.80 | 30.99 | 29.21 | 17.81 | 45.5 | 41.2 | 65.1 | 73.6 | 8.1 | 250 000 | 315 000 | 9.5 | x | x | | | | | | x | x | |
| 40 B - 1 | 2.5 | 63.50 | 38.1 | 39.37 | 22.89 | 55.7 | 51.5 | 78.9 | 91.3 | 12.75 | 355 000 | 380 000 | 15.1 | x | x | | | | | | x | x | |
| 48 B - 1 | 3 | 76.20 | 45.72 | 48.26 | 29.24 | 70.5 | 63.5 | 98.5 | 124 | 20.61 | 560 000 | 600 000 | 24.5 | x | x | | | | | | x | x | |
| 56 B - 1 | 3.5 | 88.90 | 53.34 | 53.98 | 34.32 | 81.3 | 77 | 114.7 | 140 | 27.9 | 850 000 | 950 000 | 36.5 | x | x | | | | | | | x | |
| 64 B - 1 | 4 | 101.60 | 60.96 | 63.5 | 39.4 | 92 | 93.3 | 130 | 143 | 36.25 | 1 120 000 | - | 50 | x | x | | | | | | | x | |
| 72 B - 1 | 4.5 | 114.30 | 68.58 | 72.39 | 44.5 | 103.8 | 105.3 | 147 | 161 | 46.2 | 1 400 000 | - | 65 | x | x | | | | | | | | x |

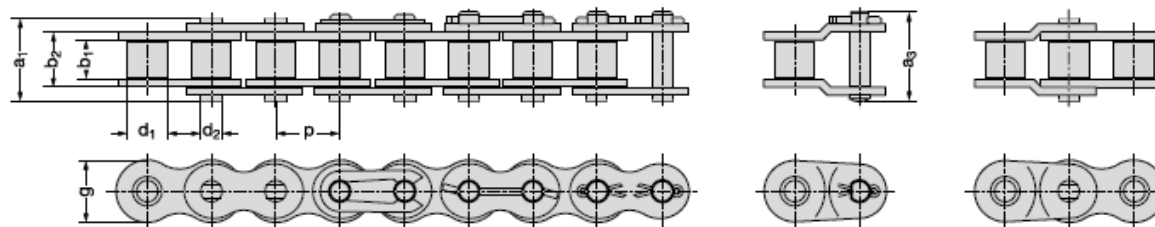


B inner link
A outer link
E connecting link with clip
S connecting link with cotter pin
L cranked link with cotter pin
C double cranked link

| Chain - No. | Pitch p | | Inner width | Roller Ø | Pin Ø | Inner link width | Link plate height | Median size | Pin length | Length of conn link pin | Bearing area | Required min. breaking strength DIN/ISO | Rexnord minimum breaking strength | Weight | Components | | | | | | | | | | | | | | | |
|-------------|---------|--------|-------------|----------|-------|------------------|-------------------|-------------|------------|-------------------------|--------------|---|-----------------------------------|--------|------------|------------|------------|------------|---|---|------------|------------|---|-------|-------|-----|---|---|---|---|
| | | | | | | | | | | | | | | | b_1 min. | d_1 max. | d_2 max. | b_2 max. | g | e | a_1 max. | a_3 max. | A | F_B | F_B | q | A | B | C | E |
| | inch | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | cm ² | N | N | kg/m | | | | | | | | | | | | | | | |
| 06 B - 2 | 0.375 | 9.52 | 5.72 | 6.35 | 3.28 | 8.53 | 8.2 | 10.24 | 23.8 | 27.1 | 0.56 | 16 900 | 18 000 | 0.78 | | | x | x | x | | | | | | | | | | | |
| 08 B - 2 | 0.5 | 12.70 | 7.75 | 8.51 | 4.45 | 11.3 | 11.6 | 13.92 | 30.6 | 34.9 | 1.01 | 31 100 | 45 000 | 1.4 | x | x | x | x | x | | | | | | | | | | | |
| 10 B - 2 | 0.625 | 15.87 | 9.65 | 10.16 | 5.08 | 13.28 | 14.6 | 16.59 | 35.5 | 40.3 | 1.34 | 44 500 | 50 000 | 1.8 | x | x | x | x | x | | | | | | | | | | | |
| 12 B - 2 | 0.75 | 19.05 | 11.68 | 12.07 | 5.72 | 15.62 | 15.9 | 19.46 | 41.7 | 46.8 | 1.79 | 57 800 | 64 000 | 2.3 | x | x | x | x | x | | | | | | | | | | | |
| 16 B - 2 | 1 | 25.40 | 17.02 | 15.88 | 8.28 | 25.4 | 20.5 | 31.88 | 67.4 | 73.4 | 4.21 | 106 000 | 140 000 | 5.3 | x | x | x | x | x | | | | | | | | | | | |
| 20 B - 2 | 1.25 | 31.75 | 19.56 | 19.05 | 10.19 | 29 | 25.7 | 36.45 | 76.9 | 83.6 | 5.91 | 170 000 | 210 000 | 7.25 | x | x | | | | | | | | | | | | | | |
| 24 B - 2 | 1.5 | 38.10 | 25.4 | 25.4 | 14.63 | 37.9 | 33 | 48.36 | 102.2 | 112.7 | 11.09 | 280 000 | 370 000 | 13.75 | x | x | | | | | | | | | | | | | | |
| 28 B - 2 | 1.75 | 44.45 | 30.99 | 27.94 | 15.9 | 46.5 | 37 | 59.56 | 122.8 | 132.7 | 14.79 | 360 000 | 500 000 | 17.3 | x | x | | | | | | | | | | | | | | |
| 32 B - 2 | 2 | 50.80 | 30.99 | 29.21 | 17.81 | 45.5 | 41.2 | 58.55 | 123.6 | 132.4 | 16.21 | 450 000 | 530 000 | 18.8 | x | x | | | | | | | | | | | | | | |
| 40 B - 2 | 2.5 | 63.50 | 38.1 | 39.37 | 22.89 | 55.7 | 51.5 | 72.29 | 151.2 | 163.8 | 25.5 | 630 000 | 750 000 | 29.9 | x | x | | | | | | | | | | | | | | |
| 48 B - 2 | 3 | 76.20 | 45.72 | 48.26 | 29.24 | 70.5 | 63.5 | 91.21 | 189.7 | 215.2 | 41.23 | 1 000 000 | 1 250 000 | 48.6 | x | x | | | | | | | | | | | | | | |
| 56 B - 2 | 3.5 | 88.90 | 53.34 | 53.98 | 34.32 | 81.3 | 77 | 106.6 | 221.3 | 246.5 | 55.8 | 1 600 000 | 1 900 000 | 72.5 | x | x | | | | | | | | | | | | | | |
| 64 B - 2 | 4 | 101.60 | 60.96 | 63.5 | 39.4 | 92 | 93.3 | 119.89 | 250 | 263 | 72.5 | 2 000 000 | 2 000 000 | 98 | x | x | | | | | | | | | | | | | | |
| 72 B - 2 | 4.5 | 114.30 | 68.58 | 72.39 | 44.5 | 103.8 | 105.3 | 136.27 | 283 | 297 | 92.4 | 2 500 000 | 2 500 000 | 128 | x | x | | | | | | | | | | | | | | |

M04/GB/2013/01-DV // No liability accepted for misprints or errors!

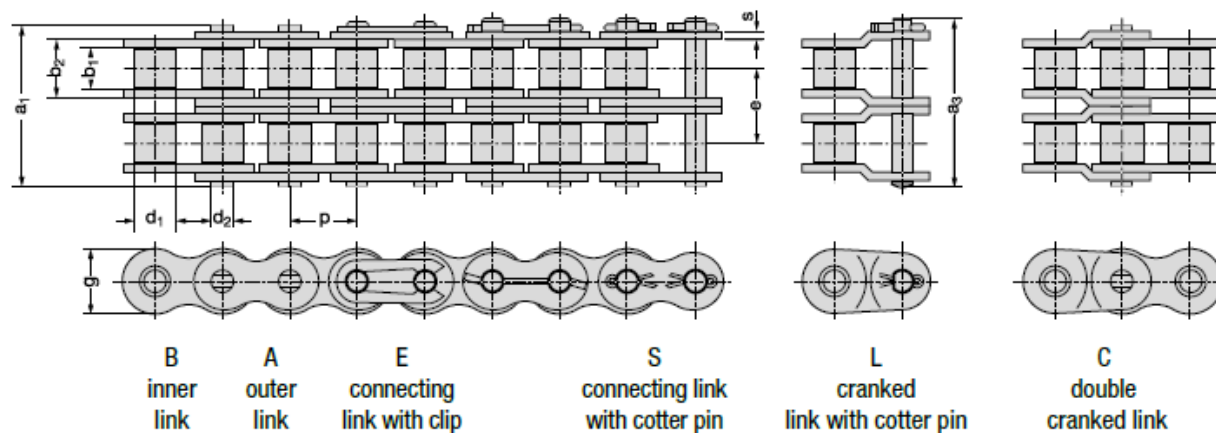


| Chain - No. | Pitch p | | Inner width | Roller Ø | Pin Ø | Inner link width | Link plate height | Median size | Pin length | Length of conn link pin | Bearing area | Required min. breaking strength DIN / ISO | Rexnord minimum breaking strength | Weight | Components | | | | | | | |
|-------------|---------|--------|-------------|----------|-------|------------------|-------------------|-------------|------------|-------------------------|--------------|---|-----------------------------------|--------|---------------------|--------------------|---------------------|--------------------|---|---|---------------------|---------------------|
| | | | | | | | | | | | | | | | b ₁ min. | d ₁ max | d ₂ max. | b ₂ max | g | e | a ₁ max. | a ₃ max. |
| | Inch | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | cm ² | N | N | kg/m | | | | | | | |
| 06 B - 3 | 0.375 | 9.52 | 5.72 | 6.35 | 3.28 | 8.53 | 8.3 | 10.24 | 34 | 37.3 | 0.84 | 24 900 | 26000 | 1.18 | | | x | x | x | | | |
| 08 B - 3 | 0.5 | 12.70 | 7.75 | 8.51 | 4.45 | 11.3 | 11.6 | 13.92 | 44.6 | 48.8 | 1.51 | 44 500 | 64000 | 2.1 | x | x | x | x | x | | | |
| 10 B - 3 | 0.625 | 15.87 | 9.65 | 10.16 | 5.08 | 13.28 | 14.6 | 16.59 | 52.2 | 56.9 | 2.02 | 66 700 | 75000 | 2.6 | x | x | x | x | x | | | |
| 12 B - 3 | 0.75 | 19.05 | 11.68 | 12.07 | 5.72 | 15.62 | 15.9 | 19.46 | 61.3 | 66.3 | 2.68 | 86 700 | 96000 | 3.4 | x | x | x | x | x | | | |
| 16 B - 3 | 1 | 25.40 | 17.02 | 15.88 | 8.28 | 25.4 | 20.5 | 31.88 | 99.3 | 105.3 | 6.31 | 160 000 | 210000 | 7.8 | x | x | x | x | x | | | |
| 20 B - 3 | 1.25 | 31.75 | 19.56 | 19.05 | 10.19 | 29 | 25.7 | 36.45 | 113.4 | 121.2 | 8.87 | 250 000 | 315000 | 10.85 | x | x | | | | x | x | |
| 24 B - 3 | 1.5 | 38.10 | 25.4 | 25.4 | 14.63 | 37.9 | 33 | 48.36 | 150.5 | 160.4 | 16.63 | 425 000 | 560000 | 20.5 | x | x | | | | x | x | |
| 28 B - 3 | 1.75 | 44.45 | 30.99 | 27.94 | 15.9 | 46.5 | 37 | 59.56 | 182.3 | 192.2 | 22.18 | 530 000 | 750000 | 25.75 | x | x | | | | x | x | |
| 32 B - 3 | 2 | 50.80 | 30.99 | 29.21 | 17.81 | 45.5 | 41.2 | 58.55 | 182.2 | 191 | 24.31 | 670 000 | 795000 | 27.95 | x | x | | | | x | x | |
| 40 B - 3 | 2.5 | 63.50 | 38.1 | 39.37 | 22.89 | 55.7 | 51.5 | 72.29 | 223.5 | 236.1 | 38.25 | 950 000 | 117000 | 44.8 | x | x | | | | x | x | |
| 48 B - 3 | 3 | 76.20 | 45.72 | 48.26 | 29.24 | 70.5 | 63.5 | 91.21 | 281 | 306.5 | 61.84 | 1 500 000 | 1870000 | 72.5 | x | x | | | | x | x | |
| 56 B - 3 | 3.5 | 88.90 | 53.34 | 53.98 | 34.32 | 81.3 | 77 | 106.6 | 328 | 353.2 | 83.70 | 2 240 000 | 2850000 | 109 | x | x | | | | | | x |
| 64 B - 3 | 4 | 101.60 | 60.96 | 63.5 | 39.4 | 92 | 93 | 119.89 | 368.2 | 379 | 108.75 | 3 000 000 | 3000000 | 144 | x | x | | | | | | x |
| 72 B - 3 | 4.5 | 114.30 | 68.58 | 72.39 | 44.5 | 103.8 | 105 | 136.27 | 418.7 | 429.7 | 138.6 | 3 750 000 | - | 171 | x | x | | | | | | x |

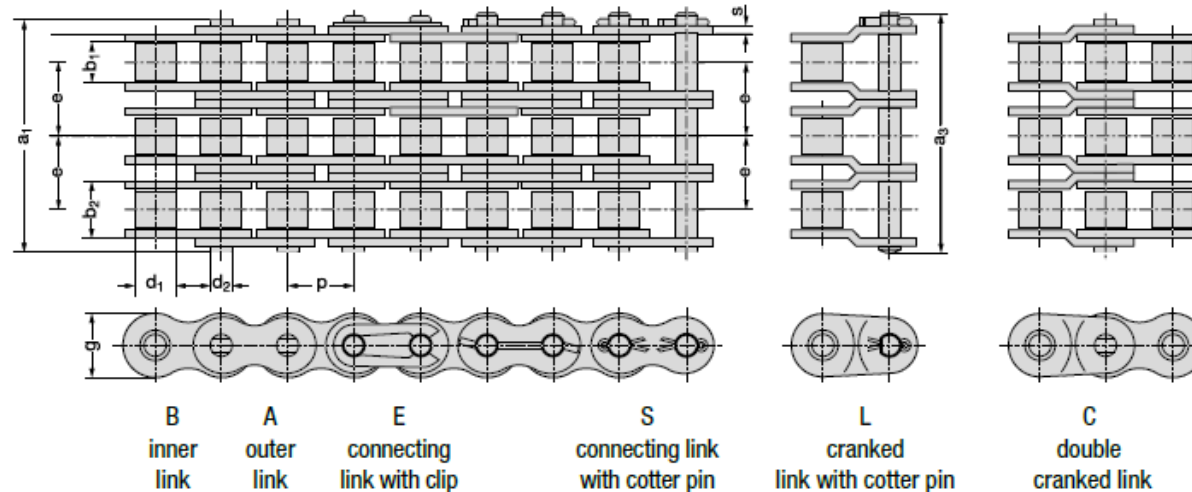

Simplex roller chains, ISO 606 / DIN 8188


ASA type / American standard

| Chain - No. | Pitch p | | Inner width | | Roller \varnothing | Pin \varnothing | Inner link width | Link plate height | Median size | Pin length | Length of conn link pin | Bearing area | Required min. breaking strength DIN / ISO | Rexnord minimum breaking strength | Weight | Components | | | | | | | | | |
|-------------|---------|-------|-------------|-----------|----------------------|-------------------|------------------|-------------------|-------------|------------|-------------------------|-----------------|---|-----------------------------------|--------|------------|----|----|---|---|---|---|---|---|--|
| | | | b_1 min. | d_1 max | d_2 max. | b_2 max | g | e | a_1 max. | a_3 max. | A | F_B | F_B | $\approx q$ | A | AK | AS | AT | B | C | E | L | S | U | |
| | Inch | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | cm ² | N | N | kg/m | | | | | | | | | | |
| 40 - 1 | 0.5 | 12.70 | 7.85 | 7.95 | 3.96 | 11.15 | 11.6 | - | 16.3 | 21.7 | 0.44 | 13 900 | 20 000 | 0.62 | | | | | x | x | x | x | | | |
| 50 - 1 | 0.625 | 15.87 | 9.4 | 10.16 | 5.08 | 13.8 | 14.6 | - | 20.3 | 25.9 | 0.7 | 21 800 | 30 000 | 1.01 | x | | | | x | x | x | x | | | |
| 60 - 1 | 0.75 | 19.05 | 12.57 | 11.91 | 5.94 | 17.7 | 17.7 | - | 25.7 | 31.5 | 1.05 | 31 300 | 40 000 | 1.48 | x | | | | x | x | x | x | x | | |
| 80 - 1 | 1 | 25.40 | 15.75 | 15.88 | 7.92 | 22.5 | 23.5 | - | 33 | 38.9 | 1.78 | 55 600 | 65 000 | 2.6 | x | | | | x | x | x | x | x | | |
| 100 - 1 | 1.25 | 31.75 | 18.9 | 19.05 | 9.53 | 27.4 | 29.2 | - | 39.4 | 44.9 | 2.61 | 87 000 | 105 000 | 3.76 | x | | | | x | | | x | x | | |
| 120 - 1 | 1.5 | 38.10 | 25.22 | 22.23 | 11.1 | 35.3 | 34.4 | - | 49.8 | 56.1 | 3.92 | 125 000 | 145 000 | 5.5 | x | | | | x | | | x | x | | |
| 140 - 1 | 1.75 | 44.45 | 25.22 | 25.4 | 12.7 | 37 | 40.8 | - | 53.4 | 59.3 | 4.7 | 170 000 | 220 000 | 7.2 | x | x | | x | x | | | x | | x | |
| 160 - 1 | 2 | 50.80 | 31.55 | 28.58 | 14.27 | 45 | 47.8 | - | 63.6 | 68.9 | 6.42 | 223 000 | 260 000 | 10.3 | x | x | | x | x | | | x | | x | |
| 180 - 1 | 2.25 | 57.15 | 35.48 | 35.71 | 17.46 | 50.85 | 50 | - | 71.3 | 80 | 8.87 | 281 000 | 360 000 | 14 | x | x | | x | x | | | x | | x | |
| 200 - 1 | 2.5 | 63.50 | 37.85 | 39.68 | 19.84 | 54.7 | 60 | - | 78 | 87.5 | 10.85 | 347 000 | 400 000 | 16.8 | x | | | x | x | | | x | | x | |
| 240 - 1 | 3 | 76.20 | 47.35 | 47.63 | 23.8 | 67.5 | 70 | - | 94.8 | 106.7 | 16.07 | 500 000 | 585 000 | 25 | x | | x | | x | | | x | | x | |

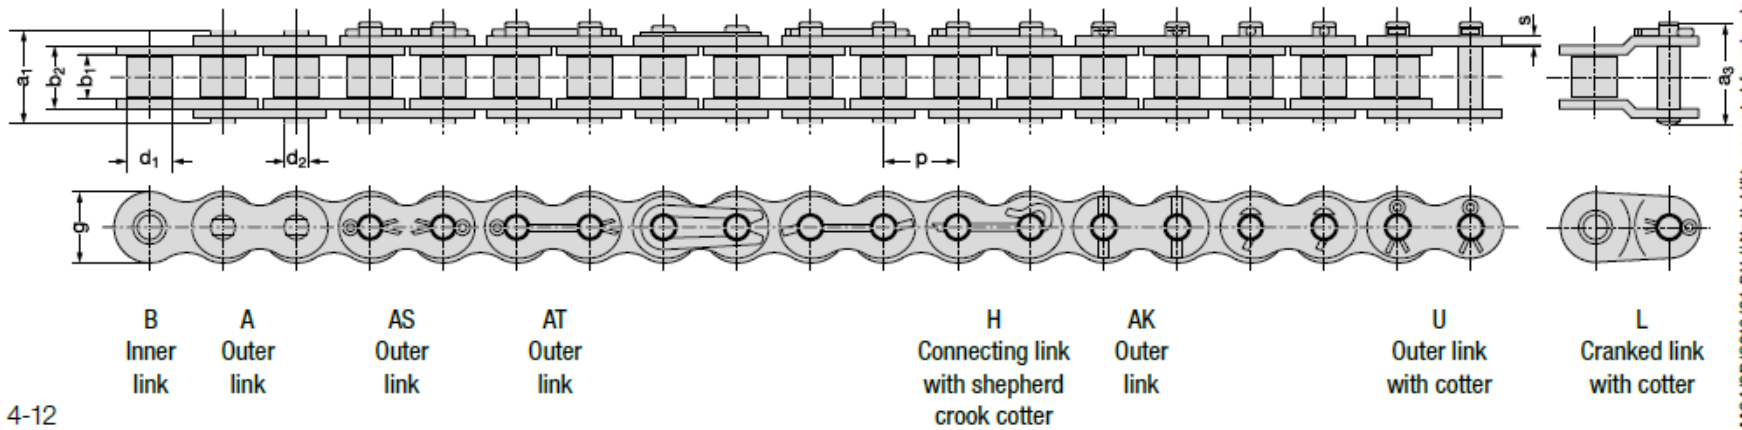


MO4/GB/2013/01-DV // No liability accepted for misprints or errors!

| Chain - No. | Pitch p | | Inner width | Roller Ø | Pin Ø | Inner link width | Link plate height | Median size | Pin length | Length of conn link pin | Bearing area | Required min. breaking strength DIN / ISO | Rexnord minimum breaking strength | Weight | Components | | | | | | | | | | | | | | | | | | | | |
|-------------|---------|--------|-------------|----------|-------|------------------|-------------------|-------------|------------|-------------------------|--------------|---|-----------------------------------|--------|---------------------|--------------------|---------------------|--------------------|---|---|---------------------|---------------------|---|----------------|----------------|-----|---|----|----|----|---|---|---|---|---|
| | | | | | | | | | | | | | | | b ₁ min. | d ₁ max | d ₂ max. | b ₂ max | g | e | a ₁ max. | a ₃ max. | A | F _B | F _B | ≈ q | A | AK | AS | AT | B | C | E | L | S |
| | Inch | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | cm ² | N | N | kg/m | | | | | | | | | | | | | | | | | | | | |
| 40 - 2 | 0.5 | 12.7 | 7.85 | 7.95 | 3.96 | 11.15 | 11.6 | 14.38 | 30.7 | 36.2 | 0.88 | 27 800 | 40 000 | 1.22 | | | | | x | | x | | | | | | | | | | | | | | |
| 50 - 2 | 0.625 | 15.875 | 9.4 | 10.16 | 5.08 | 13.8 | 14.6 | 18.11 | 38.5 | 44.0 | 1.4 | 43 600 | 60 000 | 2 | | | | | x | x | x | | | | | | | | | | | | | | |
| 60 - 2 | 0.75 | 19.05 | 12.57 | 11.91 | 5.94 | 17.7 | 17.7 | 22.78 | 48.5 | 54.4 | 2.1 | 62 600 | 80 000 | 2.95 | x | | | | x | | x | | | | | | | | | | | | | | |
| 80 - 2 | 1 | 25.4 | 15.75 | 15.88 | 7.92 | 22.5 | 23.5 | 29.29 | 62.4 | 68.1 | 3.56 | 111 200 | 150 000 | 5.2 | x | | | | x | | | | | | | | | | | | | | | | |
| 100 - 2 | 1.25 | 31.75 | 18.9 | 19.05 | 9.53 | 27.4 | 29.2 | 35.76 | 75.3 | 87.8 | 5.22 | 174 000 | 220 000 | 7.6 | x | | | | x | | | | | | | | | | | | | | | | |
| 120 - 2 | 1.5 | 38.1 | 25.22 | 22.23 | 11.1 | 35.3 | 34.4 | 45.44 | 95.3 | 101.6 | 7.84 | 250 000 | 290 000 | 10.8 | x | | | | x | | | | | | | | | | | | | | | | |
| 140 - 2 | 1.75 | 44.45 | 25.22 | 25.4 | 12.7 | 37 | 40.8 | 48.87 | 103.3 | 109.6 | 9.4 | 340 000 | 440 000 | 14.2 | x | x | | | x | | | | | | | | | | | | | | | | |
| 160 - 2 | 2 | 50.8 | 31.55 | 28.58 | 14.27 | 45 | 47.8 | 58.55 | 122.1 | 130.1 | 12.84 | 446 000 | 490 000 | 19.5 | x | x | | | x | | | | | | | | | | | | | | | | |
| 180 - 2 | 2.25 | 57.15 | 35.48 | 35.71 | 17.46 | 50.85 | 50 | 65.84 | 136.7 | 145.4 | 17.74 | 562 000 | 680 000 | 27 | x | x | | | x | | | | | | | | | | | | | | | | |
| 200 - 2 | 2.5 | 63.5 | 37.85 | 39.68 | 19.84 | 54.7 | 60 | 71.55 | 149.6 | 159.2 | 21.7 | 649 000 | 800 000 | 32.7 | x | | | | x | x | | | | | | | | | | | | | | | |
| 240 - 2 | 3 | 76.2 | 47.35 | 47.63 | 23.8 | 67.5 | 70 | 87.83 | 182.7 | 194.7 | 32.13 | 1 000 000 | 117 000 | 49.4 | x | | | | x | x | | | | | | | | | | | | | | | |

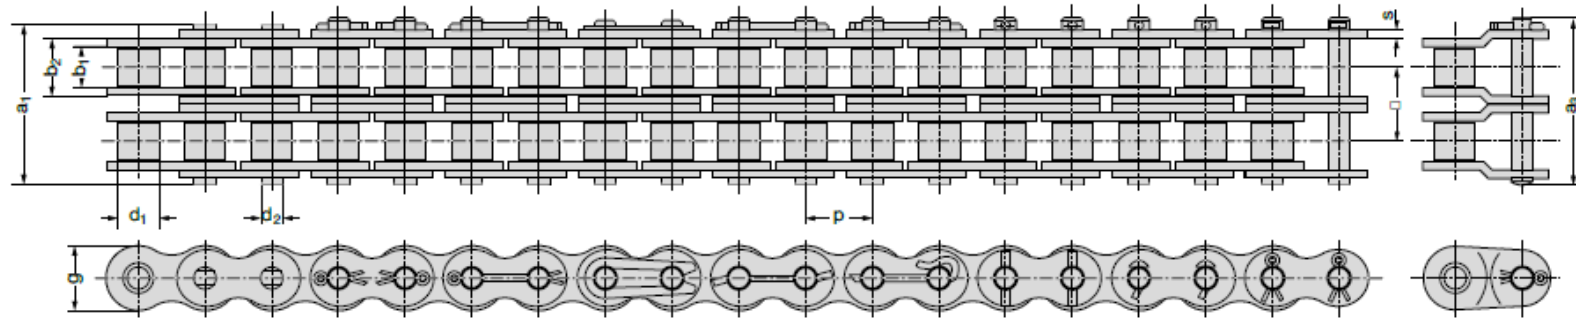

B Inner link
A Outer link
AS Outer link
AT Outer link
H Connecting link with shepherd crook cotter
AK Outer link
U Outer link with cotter
L Cranked link with cotter

| Chain - No. | Pitch p | | Inner width | Roller Ø | Pin Ø | Inner link width | Link plate height | Median size | Pin length | Length of conn link pin | Bearing area | Required min. breaking strength DIN/ISO | Rexnord minimum breaking strength | Weight | Components | | | | | | | | | | | | |
|-------------|---------|-------|-------------|----------|-------|------------------|-------------------|-------------|------------|-------------------------|--------------|---|-----------------------------------|--------|---------------------|---------------------|---------------------|---------------------|---|---|---------------------|---------------------|---|----------------|----------------|-----|---|
| | Inch | mm | | | | | | | | | | | | | b ₁ min. | d ₁ max. | d ₂ max. | b ₂ max. | g | e | a ₁ max. | a ₃ max. | A | F _B | F _B | ≈ q | A |
| | | | mm | mm | mm | mm | mm | mm | mm | mm | mm | cm ² | N | N | kg/m | | | | | | | | | | | | |
| 40 - 3 | 0.5 | 12.70 | 7.85 | 7.95 | 3.96 | 11.15 | 11.6 | 14.48 | 45.1 | 50.6 | 1.32 | 41 700 | 60 000 | 1.83 | | | | | x | | x | x | | | | | |
| 50 - 3 | 0.625 | 15.87 | 9.4 | 10.16 | 5.08 | 13.8 | 14.6 | 18.11 | 56.7 | 62.0 | 2.1 | 65 400 | 90 000 | 2.97 | x | | | | x | | x | x | | | | | |
| 60 - 3 | 0.75 | 19.05 | 12.57 | 11.91 | 5.94 | 17.7 | 17.7 | 22.78 | 71.4 | 77.2 | 3.15 | 93 900 | 120 000 | 4.35 | x | | | | x | | x | x | x | | | | |
| 80 - 3 | 1 | 25.40 | 15.75 | 15.88 | 7.92 | 22.5 | 23.5 | 29.29 | 91.7 | 97.3 | 5.35 | 166 800 | 220 000 | 7.9 | x | | | | x | | | x | x | | | | |
| 100 - 3 | 1.25 | 31.75 | 18.9 | 19.05 | 9.53 | 27.4 | 29.2 | 35.76 | 111.1 | 117.2 | 7.83 | 261 000 | 300 000 | 11.4 | x | | | | x | | | x | x | | | | |
| 120 - 3 | 1.5 | 38.10 | 25.22 | 22.23 | 11.1 | 35.3 | 34.4 | 45.44 | 140.7 | 148.3 | 11.76 | 375 000 | 450 000 | 15.8 | x | | | | x | | | | x | x | | | |
| 140 - 3 | 1.75 | 44.45 | 25.22 | 25.4 | 12.7 | 37 | 40.8 | 48.87 | 151.2 | 158.5 | 14.1 | 510 000 | 660 000 | 21.5 | x | x | | | x | | | | x | | x | | |
| 160 - 3 | 2 | 50.80 | 31.55 | 28.58 | 14.27 | 45 | 47.8 | 58.55 | 180.7 | 188.7 | 19.26 | 669 000 | 790 000 | 26.3 | x | x | | | x | | | | x | | x | | |
| 180 - 3 | 2.25 | 57.15 | 35.48 | 35.71 | 17.46 | 50.85 | 50 | 65.84 | 202 | 210.7 | 26.61 | 843 000 | 1 020 000 | 40.5 | x | x | | | x | | | | x | | x | | |
| 200 - 3 | 2.5 | 63.50 | 37.85 | 39.68 | 19.84 | 54.7 | 60 | 71.55 | 221.1 | 230.7 | 32.56 | 1 041 000 | 1 200 000 | 48.8 | x | | | x | x | | | | x | | x | | |
| 240 - 3 | 3 | 76.20 | 47.35 | 47.63 | 23.8 | 67.5 | 70 | 87.83 | 270.6 | 282.5 | 48.2 | 1 500 000 | 1 930 000 | 74.1 | x | | x | | x | | | | x | | x | | |

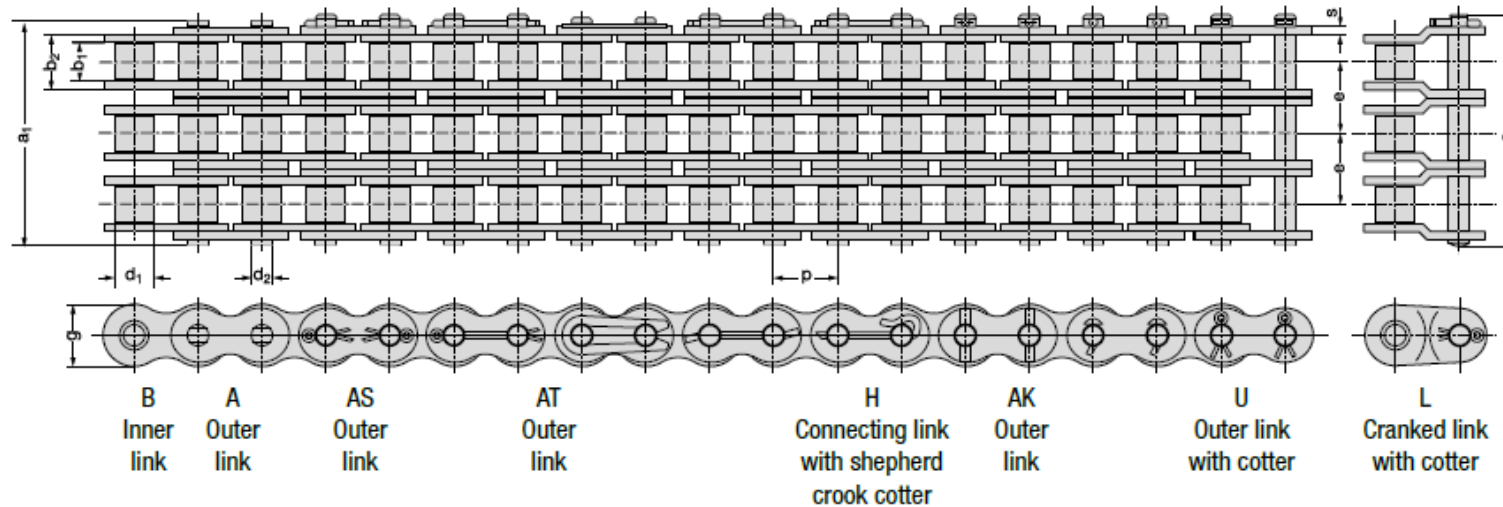



A/S Dansk Kugleleje Center, Mileparken 29, DK-2730 Herlev, Fax: 44 84 56 20

Tlf. 44 84 33 88 – dkc@dkc-as.dk